




TOP VIEW
正视图

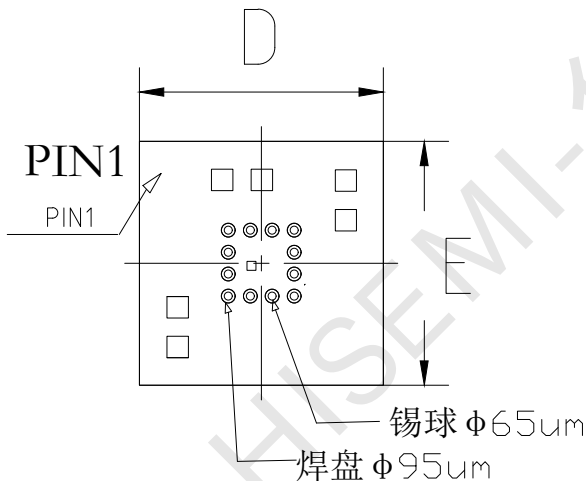


SIDE VIEW
侧视图



BOTTOM VIEW
背视图

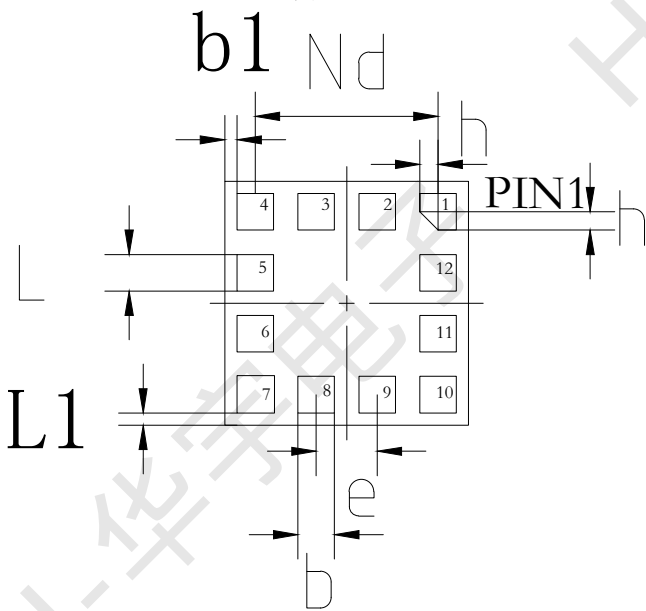

SIDE VIEW
侧视图

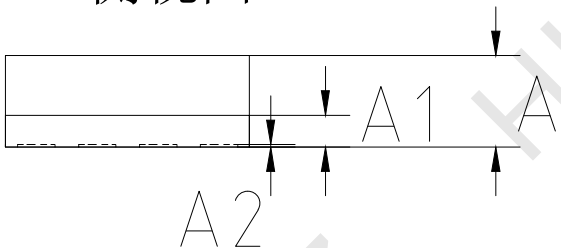

机械尺寸/mm			
字符 SYMBOL	最小值 MIN	典型值 NOMINAL	最大值 MAX
A	0.720	0.750	0.780
A1	0.230	0.260	0.290
A2	0.012	0.020	0.028
b	0.250	0.300	0.350
D	1.900	2.000	2.100
D1	4.150	4.100	4.050
Nd	1.500 BSC		
e	0.500 BSC		
L1	0.100 BSC		
b1	0.100 BSC		
h	0.150 REF		
E	1.900	2.000	2.100
L	0.250	0.300	0.350

序号	定义	PIN	序号	定义	PIN
1	GND	1	7	L2	7
2	DI1	2	8	L3	8
3	L0	3	9	D0	9
4	DI2	4	10	VCC	10
5	L1	5	11	R	11
6	B	6	12	G	12

序号	描述	版本	更新时间
1	新发行	V1.0	2024.12.10
2	基板FC阻焊开窗由115um改成95um.	v1.1	2025.4.5

 池州华宇电子科技股份有限公司 CHI ZHOU HISEMI ELECTRONICS TECHNOLOGY CO.,LTD				制图: Draw		NINGLIN 2025. 4. 5		
HY-POD-FCLGA0038				制图核查: Drawing review				
PACKAGE OUTLINE DIMENSIONS FCLGA12L (2×2×0.75-P0.5)				审核: Checker				
页数 page		单位 unit	比例 scale	视图 view	核准: Approved			
		mm	1:1					